



midas
MILEAGE



Grow with MIDAS MILEAGE...

Get the sales and profit growth you want in your retreading business by giving your customers MIDAS MILEAGE. Our high mileage compounds are designed to lower a fleet owners running cost by maximizing mileage per retread tyre.



Founded in 1969, MIDAS has grown to become Asia's largest supplier of Tyre Retreading Materials. We have focused on constantly improving compounds to provide customers with the best mileage.



ISO 9001:2015, ISO 14001:2015

Our quality system is certified by VEXIL and RAPL, to ensure that we provide you with consistent materials, on time, every time.

VEXIL BUSINESS PROCESS SERVICES



Certificate

This Certificate is issued to

Midas Treads (India) Pvt. Ltd.
P.O. Vazhoor East
Kottayam
Kerala 686 504
INDIA

who have implemented a Quality Management System, which meets the requirements laid down in ISO 9001:2015, with the following scope:

Manufacture of Precured Tread Rubber, Vulcanizing Solution and Bonding Gum

Certificate No. : Q9122433
Original Issue : 07 September 2015
Latest Issue : 07 September 2024
Valid Till : 06 September 2027



for Vexil Business Process Services Private Limited
139-D, Karim Nagar, Delhi 110 027





ISO 9001:2015

To check the validity of this certificate, please email to info@vexitps.com
The validity of this certificate can also be verified at <http://www.vexitps.com>
Unauthorised reproduction of this certificate is not permitted.
Upon request, the Certificate shall be returned to Vexil Business Process Services Private Limited.



Accredited Registrar - 119012A

Registration Certificate

This is to certify that

MIDAS TREADS INDIA PVT. LTD.
VAZHOOR EAST, KOTTAYAM DISTRICT - 686 504, KERALA, INDIA.

has been assessed by RAPL and found to comply with the requirements of

ISO 14001 : 2015

Environmental Management Systems

For the following activities:
MANUFACTURE OF PRECURED TREAD RUBBER, VULCANIZING SOLUTION AND BONDING GUM.

Certificate Number: E2023094629
Date of certification: 21/09/2023
1st Surveillance on or before: 20/09/2024
1nd Surveillance on or before: 20/09/2025
Certification Valid Until: 20/09/2026









Director (Certification)
Royal Assessments Pvt. Ltd.
623 A, Tower-B, (11th), Plot No. A-40, Sector - 62, Noida 201301, India.
www.royalapi.com, info@royalapi.com
Phone : +91 120 4251529
This Certificate can be verified at www.royalapi.com

This Certificate represents the property of Royal Assessments Private Limited. Must be returned on request or if certificate is withdrawn. Validity of this certificate is subject to successful surveillance audits. RAPL is accredited by EGAC. EGAC is member of International Accreditation Forum (IAF) and signatory of MLA.

RANGE OF PRODUCTS

Precured Treads

Made from high mileage compounds, our treads have been accepted the world over and tested on all road conditions.

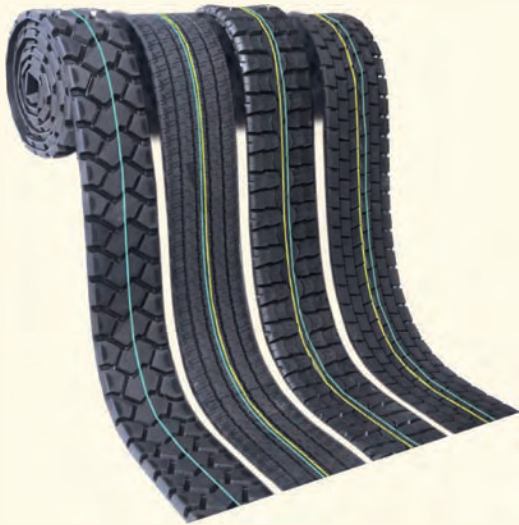

Round Tread

Continuous treads for use with a suitable builder. Please contact us for details.



White/non Marking Tread

Our white/non marking tread has become accepted all over the world and especially in Europe. Available in the design of your choice.



Conventional (Hot) Rubber

Increased scorch safety to maximise shelf life. Different compounds available for different uses including (Truck, Tractor and OTR). Available in customer specified sizes.



Bonding Gum

Our gum is made from 100% natural rubber to increase tack. Available in customer specified sizes also. Different types of Gum are available for both Precured and Hot process. Can be used to fill nail holes and repair injured parts of casing.



RANGE OF PRODUCTS

Black Vulcanizing Solution

Available as **THICK** and **RTU** solution. Compatible with both precured and hot process.



Steel Tack

- Premium vulcanizing solution for radial tyre retreading
- Superior rubber to steel bonding
- Ideal for hot and cold retreading



Rope Rubber

To be used in rubber extruder guns to repair rasping area. Provides excellent process safety and tack.



Tyre Coat

- Black Silky Finish
- Protect Tyre Side Wall
- Long Lasting
- Dilute 1:4 In Water



Orbi Strip

Available for Truck, OTR and car applications.



RANGE OF PRODUCTS

Curing Envelopes

Heat resistant envelopes for ease of use and long life.

Outer Envelope

Inner Envelope

Details at the Back



Curing Bags



Details at the Back

Flaps

Details at the Back



Wicking Pad

For Double Envelope System

Details at the Back



L Ring


LR 20 for industrial tyres




OTR Tyres 'O' Ring

Sealing the tubeless tyre beads of OTR vehicle with split rims

Details at the Back

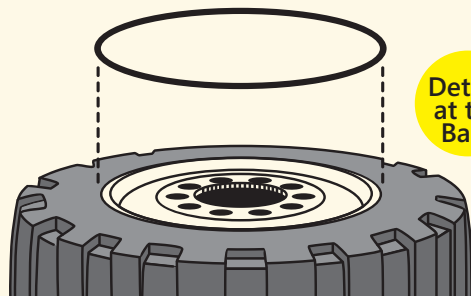





TRACTION



BDE





mipias
MILEAGE

 mm	 mm	 m	 kg/m
230	17.5	10.50	5.19
220	17.5	10.50	4.70



M-1
M+S





mipias
MILEAGE

 mm	 mm	 m	 kg/m
280	19.0	3.70	5.46
270	19.0	3.55	5.45
260	19.0	10.50	5.05
250	19.0	10.50	4.91
240	19.0	10.50	4.77
230	19.0	10.50	4.42



GRTA
M+S

mipias
MILEAGE





 mm	 mm	 m	 kg/m
250	17.0	10.50	4.70
240	17.0	10.50	4.68
230	17.0	3.73	4.53

WITH WINGS



MRS 2
M+S




mipias
MILEAGE

 mm	 mm	 m	 kg/m
275	20.0	3.73	6.30
260	20.0	3.73	5.97



M-10
M+S





mipias
MILEAGE

 mm	 mm	 m	 kg/m
280	21.0	3.40	6.30
270	21.0	3.60	6.11
280	20.0	3.30	6.28
270	20.0	3.40	5.76
260	20.0	10.50	5.70
250	20.0	10.50	5.46
240	20.0	10.50	5.21
230	20.0	3.70	4.95
230	19.0	10.50	4.50
220	20.0	3.70	4.78
220	15.0	3.30	3.52
210	15.0	3.30	3.36



M 12
M+S

mipias
MILEAGE





 mm	 mm	 m	 kg/m
285	17.0	3.10	5.68
270	17.0	3.73	5.71
260	17.0	3.73	5.31

TRACTION



M-8
M+S







 mm	 mm	 m	 kg/m
260	19.0	10.50	4.73
250	19.0	10.50	4.60
240	19.0	10.50	4.48
190	15.0	10.50	2.76
180	14.0	10.50	2.50
170	13.0	10.50	2.25
160	14.0	3.38	2.16
150	14.5	2.61	2.09
140	13.0	3.38	1.76



M-26
M+S







 mm	 mm	 m	 kg/m
285	18.0	3.30	5.90
275	18.0	10.50	5.40
265	18.0	10.50	5.20
260	18.0	10.50	5.14
250	18.0	10.50	4.90
240	18.0	10.50	4.78
230	18.0	10.50	4.57
220	14.5	3.25	3.40
220	13.5	3.25	3.38
195	14.0	3.15	3.17



M-29
M+S







 mm	 mm	 m	 kg/m
280	18.0	3.30	5.82
270	18.0	10.50	5.62
260	18.0	10.50	5.24
250	18.0	10.50	5.05



MTRK
M+S







 mm	 mm	 m	 kg/m
285	20.0	3.73	6.10
270	20.0	3.73	5.58
260	20.0	3.73	5.30
250	20.0	3.73	5.17



M-36







 mm	 mm	 m	 kg/m
260	21.0	3.73	5.90



M WAY
M+S







 mm	 mm	 m	 kg/m
260	21.0	3.73	6.39

TRACTION



PSD
M+S







 mm	 mm	 m	 kg/m
240	20.0	3.73	5.44
230	20.0	3.73	5.17
220	20.0	3.73	5.12



RM-31
M+S







 mm	 mm	 m	 kg/m
270	20.0	3.30	5.80
260	20.0	3.30	5.73
250	20.0	3.43	5.60
240	20.0	3.38	5.47
220	20.0	3.30	5.00
250	16.0	3.43	4.69
240	16.0	3.38	4.53



ZZ
M+S






 mm	 mm	 m	 kg/m
250	18.0	10.50	4.64
240	18.0	10.50	4.36
230	18.0	10.50	4.11
220	19.0	3.38	3.89

BUS & LIGHT TRUCK



H-27




 mm	 mm	 m	 kg/m
203	13.5	3.40	3.32
194	13.5	3.30	3.27
175	12.0	2.62	2.56
160	12.0	2.51	2.31



M-9







 mm	 mm	 m	 kg/m
270	13.0	3.28	4.42
260	13.0	3.28	4.26
250	13.0	3.28	4.09
240	13.0	3.28	4.02
230	13.0	3.73	3.51
220	13.0	3.73	3.40
215	13.0	3.73	3.27




M-15



 mm	 mm	 m	 kg/m
260	16.0	10.50	5.21
250	16.0	10.50	4.99





WITH WINGS

TRAILER



M-5 (B)







 mm	 mm	 m	 kg/m
320	14.5	3.73	5.46
295	15.0	3.60	5.57

WITH WINGS



M-7






 mm	 mm	 m	 kg/m
295	13.0	3.40	4.85

WITH WINGS



M-7







 mm	 mm	 m	 kg/m
390	13.0	3.40	6.43
370	13.0	4.20	5.97
360	13.0	3.60	6.08
350	13.0	3.60	5.53



M-18







 mm	 mm	 m	 kg/m
310	15.0	3.30	5.86
295	15.0	3.40	5.62
287	15.0	3.50	5.50

WITH WINGS



M-7







 mm	 mm	 m	 kg/m
335	13.0	3.40	5.50
320	20.0	3.73	7.16
320	13.0	3.73	5.18


WITH WINGS



M-18 NEW



 mm	 mm	 m	 kg/m
287	15.0	3.73	5.66


CROSS SECTION





WITH WINGS

MIXED APPLICATION



M-30






 mm	 mm	 m	 kg/m
240	14.0	3.38	4.17
240	13.0	3.73	3.91
235	14.0	3.38	4.08
230	14.0	3.73	3.83
225	13.0	3.73	3.73
220	14.0	3.30	3.79
220	13.0	3.73	3.62
215	13.0	3.73	3.46



M-32







 mm	 mm	 m	 kg/m
260	18.0	10.50	5.46
250	18.0	10.50	5.27
240	18.0	10.50	4.99
230	18.0	4.20	4.66



MAXIMUS (L)







 mm	 mm	 m	 kg/m
270	14.0	3.73	4.55
260	14.0	3.73	4.12
250	14.0	7.50	3.96
240	14.0	7.50	3.92
235	14.0	10.50	3.79
230	14.0	10.50	3.78
225	14.0	7.50	3.48
220	14.0	7.50	3.57
215	15.0	10.50	3.63
215	14.0	7.50	3.30
210	15.0	10.50	3.64
205	14.5	3.23	3.27
205	13.5	3.73	3.18
194	13.5	3.30	3.03
187	13.5	3.30	3.03
180	14.0	3.73	2.90
160	11.0	7.53	2.31
150	11.0	5.02	2.07




M-34



 mm	 mm	 m	 kg/m
240	14.0	3.73	4.13
230	13.5	3.73	3.60
225	14.0	3.73	3.81
215	14.0	3.73	3.70

OFF ROAD



**GPZH
M+S**



 mm	 mm	 m	 kg/m
270	32.0	10.50	8.10
270	20.0	3.73	5.80
260	19.0	10.50	5.43
250	22.0	10.50	5.90
250	19.0	3.73	5.42
240	24.0	3.70	6.16
240	21.0	3.38	5.18
240	19.0	10.50	4.90
240	16.0	3.30	4.37
232	22.0	10.50	5.42
230	21.0	3.38	4.85
230	20.0	10.50	4.66
230	20.0	3.73	4.90
225	20.0	3.73	4.83
215	19.0	3.30	4.24
210	15.5	3.25	3.54



LOG LUGGER



 mm	 mm	 m	 kg/m
240	21.0	3.73	5.44
220	17.0	3.73	4.18
210	15.0	3.40	3.48



MOR-1



 mm	 mm	 m	 kg/m
315	25.0	3.50	8.14



CROSS SECTION



ID MINES



 mm	 mm	 m	 kg/m
230	19.0	4.00	4.77
225	18.0	4.00	4.33
205	16.0	3.23	3.72
200	13.0	3.15	3.01
200	13.0	2.82	3.01
150	12.0	5.00	2.07



MOR-2







 mm	 mm	 m	 kg/m
260	24.0	3.30	6.56
250	24.0	3.30	6.43
240	24.0	3.30	6.18
230	24.0	3.30	5.91

SPECIAL APPLICATION



DB TREAD



 mm	 mm	 m	 kg/m
500	12.5	4.00	7.55
295	19.0	3.25	6.36
240	23.0	3.40	6.10
230	16.0	3.10	4.45
220	19.0	3.40	4.71
205	22.0	3.28	5.12
205	20.0	3.30	4.85
200	14.0	2.55	3.27
190	19.0	3.23	4.02
175	16.0	3.20	3.31
140	14.0	2.40	2.25



GRML







 mm	 mm	 m	 kg/m
320	20.0	4.00	6.22
300	18.0	4.00	5.47
290	18.0	3.75	5.31



HFD







 mm	 mm	 m	 kg/m
520	45.0	0.45	15.56
445	40.0	1.18	11.44



GARTIC



 mm	 mm	 m	 kg/m
330	15.5	3.70	6.84
295	15.5	3.90	5.95



MNRT






 mm	 mm	 m	 kg/m
390	16.0	3.40	6.40
375	16.0	3.40	6.31
320	16.0	3.40	5.29
290	16.0	3.40	4.79

SPECIAL APPLICATION



MET







 mm	 mm	 m	 kg/m
359	24.0	3.60	8.53



SPT 9







 mm	 mm	 m	 kg/m
350	23.0	3.26	6.90



M PORT-1







 mm	 mm	 m	 kg/m
440	52.0	4.80	21.25
438	45.0	4.85	18.87



PRT







 mm	 mm	 m	 kg/m
365	18.0	3.60	7.31
300	11.0	3.73	3.70



KAMA







 mm	 mm	 m	 kg/m
362	24.0	3.76	7.87



XHA






 mm	 mm	 m	 kg/m
520	38.0	1.18	17.10
470	36.0	1.09	14.58

WINTER



DNM
M+S





 mm	 mm	 m	 kg/m
275	20.0	3.73	5.97
260	21.0	3.73	5.71
250	21.0	3.30	5.69
240	21.0	3.70	5.30



M-17
M+S







 mm	 mm	 m	 kg/m
250	22.0	3.40	6.01
240	22.0	3.40	5.76



MDR
M+S





 mm	 mm	 m	 kg/m
280	19.0	3.10	5.36
270	20.5	3.90	5.74
260	20.5	3.80	5.55



M-20
M+S



 mm	 mm	 m	 kg/m
330	23.0	3.73	7.58
300	23.0	3.30	6.97
280	20.0	3.73	5.82
270	20.0	3.50	5.39
260	20.0	3.73	5.29
250	20.0	3.50	5.27
240	20.0	3.73	4.88
230	20.0	3.70	4.66



MRS
M+S






 mm	 mm	 m	 kg/m
285	19.0	3.30	6.36
270	21.0	3.30	6.30
260	21.0	3.30	6.15
260	19.0	3.30	5.79
250	19.0	3.30	5.58



MW 31
M+S



 mm	 mm	 m	 kg/m
285	19.0	3.10	5.65
270	20.0	3.73	5.60
260	20.0	3.73	5.50
250	20.0	3.73	5.30



SNOW GRIP TEST FOR C3 TIRES



The below tires using Midas retreads were tested against a SRTT Michelin tire to determine Snow Index values. They have exceeded the required value. The tire have passed the snow performance test successfully.


List of retreadable sizes

1.	295	60	R	22.5
2.	295	80	R	22.5
3.	315	60	R	22.5
4.	315	70	R	22.5
5.	315	80	R	22.5
6.	12		R	22.5
7.	13		R	22.5

DNM



M-5



M-10




M-16



M-20



M-26



M-29



MDR




MHAM



MML-2




MW-31



MRS



MRS-2



ARC / SNAP SEAL / FLEX SEAL SYSTEM




Outer Envelope

Outer Envelope skirt length extends **2.0 inches** below the tyre bead on each side.

Sl. No.	Product Code	Tyre Size (Suggested)
1	46 x 15	325/95 R 24, 12.00 R 24
2	44 x 16	12 R 24.5, 11 R 24.5, 315/80 R 22.5, 10.00 R 22
3	44 x 14	11.00 R 24, 13 R 22.5, 12.00 R 22, 11.00 R 22, 14/80 R 20, 12.00 R 20, 11.00 R 20
4	43 x 14	385/65 R 22.5, 365/80 R 20
5	42 x 14	315/75 R 22.5, 295/80 R 22.5, 295/75 R 22.5, 12 R 22.5, 10.00 R 20
6	42 x 15	315/70 R 22.5, 305/75 R 22.5, 305/70 R 22.5, 275/80 R 22.5, 11 R 22.5
7	40 x 13	275/70 R 22.5, 265/70 R 22.5, 10 R 22.5, 9.00 R 20, 305/70 R 19.5
8	35 x 12 RC	7.50 R 20, 285/70 R 19.5, 265/70 R 19.5, 9.00 R 16, 8.25 R 16, 8.25 R 15
9	35 x 12 ST	7.00 R 20, 6.50 R 20, 245/70 R 19.5
10	32 x 11 CMT	245/65 R 19.5, 235/70 R 19.5, 245/70 R 17.5, 235/75 R 17.5 9.5 R 17.5, 10 R 16.5, 265/75 R 16, 245/75 R 16, 235/85 R 16 215/85 R 16, 10.00 R 15 LT
11	32 x 13 CMT	225/70 R 19.5, 225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5
12	23 x 07	6.50-10
13	22 x 09	6.00-9
14	19 x 07	4.50-10, 5.00-8
15	17 x 06	4.00-8

Note: All suggested envelope selections are to be used as a guide only.

DOUBLE ENVELOPE SYSTEM

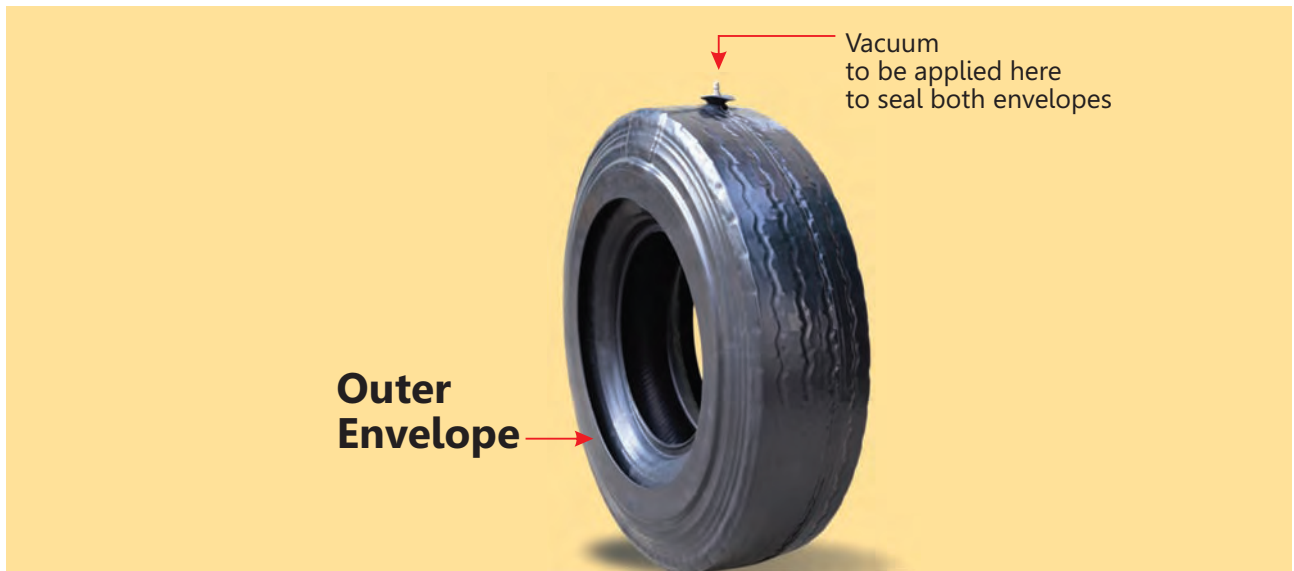

Outer Envelope

Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 28*	14.00 R 24
2	46 x 22*	445/65 R 22.5, 425/65 R 22.5, 14.00 R 20
3	44 x 22*	325/95 R 24, 12.00 R 24, 11.00 R 24, 12.00 R 22
4	44 x 25*	12 R 24.5, 13 R 22.5, 14/80 R 20, 12.00 R 20
5	44 x 19*	445/65 R 19.5
6	43 x 25*	385/65 R 22.5, 365/80 R 20
7	42 x 22*	11 R 24.5, 315/80 R 22.5, 315/75 R 22.5, 315/70 R 22.5, 12 R 22.5, 11.00 R 22, 11.00 R 20
8	42 x 25*	295/80 R 22.5, 11 R 22.5, 10.00 R 22
9	40 x 18*	305/75 R 22.5, 305/70 R 22.5, 295/75 R 22.5, 10.00 R 20
10	40 x 21*	275/80 R 22.5, 275/70 R 22.5, 10 R 22.5
11	40 x 25*	9.00 R 20
12	38 x 25	265/70 R 22.5, 8.25 R 20
13	38 x 20	445/45 R 19.5, 305/70 R 19.5, 10.00 R 15, TR/LB
14	35 x 20*	7.50 R 20, 7.00 R 20, 6.50 R 20, 265/70 R 19.5
15	35 x 16*	285/70 R 19.5, 9.00 R 16
16	32 x 16 CMT	245/70 R 19.5, 9.5 R 17.5, 10 R 16.5, 265/75 R 16
17	32 x 19 CMT	245/65 R 19.5, 235/70 R 19.5, 225/70 R 19.5, 245/75 R 16 235/85 R 16, 215/85 R 16, 10.00 R 15 LT
18	32 x 16	8.25 R 16, 8.25 R 15
19	31 x 18	245/70 R 17.5, 235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5 205/75 R 17.5, 7.50 R 16, 7.00 R 16, 7.50 R 15
20	28 x 16	225/75 R 16, 215/75 R 16, 6.50 R 16, 6.00 R 16, 7.00 R 15

Note: All suggested envelope selections are to be used as a guide only. Variations in tyre sizes, tyre dimensions, precured tread designs and precured tread thickness may require a smaller or larger envelope size. In some instances it may be necessary to measure the built tyre to determine the correct envelope size.

GREEN envelope can be ordered for higher life. All our envelopes marked with * are also available in **GREEN**.

DOUBLE ENVELOPE SYSTEM



Inner Envelope

Sl. No.	Product Code	Tyre Size (Suggested)
1	1300 x 610	12.00 R 24, 325/95 R 24, 13.00 R 24, 14.00 R 24, 11 R 24.5, 12 R 24.5
2	1100 x 480	385/65 R 22.5, 385/55 R 22.5, 315/80 R 22.5, 315/75 R 22.5 13 R 22.5, 12 R 22.5, 11.00 R 22, 12.00 R 20, 11.00 R 20, 425/55 R 19.5
3	1060 x 480 M	315/70 R 22.5, 305/70 R 22.5, 295/80 R 22.5, 295/75 R 22.5 11 R 22.5, 10.00 R 22, 295/90 R 20, 10.00 R 20
4	1060 x 480 U	275/80 R 22.5, 275/70 R 22.5, 10 R 22.5, 275/80 R 20, 9.00 R 20
5	780 x 400	9 R 17.5, 8.5 R 17.5, 8 R 17.5, 235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5 205/75 R 17.5, 265/70 R 17.5, 245/70 R 17.5, 205/65 R 17.5, 8.25 R 16 7.50 R 16, 7.00 R 16, 235/85 R 16, 215/85 R 16, 225/75 R 16, 215/75 R 16 245/70 R 16, 255/75 R 15, 7.50 R 15

WICKING PAD

Double Envelope System

1250 x 175

All truck tyres

ARC / Snap Seal / Flex Seal System & Rim and Tube System

520 x 175

All truck tyres

RIM AND TUBE (Seals with removable flanges)



Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 21	14.00 R 24
2	46 x 22*	325/95 R 24, 12.00 R 24
3	46 x 15	445/65 R 22.5
4	46 x 19	14.00 R 20
5	44 x 22*	12 R 24.5, 11 R 24.5, 315/80 R 22.5, 11.00 R 22
6	44 x 19*	11.00 R 24, 13 R 22.5, 12.00 R 22, 14/80 R 20, 12.00 R 20
7	44 x 16	425/65 R 22.5, 445/65 R 19.5
8	43 x 20*	385/65 R 22.5, 365/80 R 20
9	42 x 19*	315/75 R 22.5, 12 R 22.5, 10.00 R 22, 10.00 R 20
10	42 x 22*	315/70 R 22.5, 305/75 R 22.5, 305/70 R 22.5, 295/80 R 22.5, 11 R 22.5
11	42 x 17*	11.00 R 20
12	40 x 18*	295/75 R 22.5, 275/80 R 22.5, 10 R 22.5, 9.00 R 20
13	40 x 13	445/45 R 19.5
14	38 x 20	275/70 R 22.5, 265/70 R 22.5, 8.25 R 20, 305/70 R 19.5, 10.00 R 15 TR/LB
15	35 x 16*	7.50 R 20, 7.00 R 20, 6.50 R 20, 285/70 R 19.5, 265/70 R 19.5 245/70 R 19.5, 8.25 R 16
16	35 x 13*	9.00 R 16
17	32 x 16* CMT	245/65 R 19.5, 235/70 R 19.5, 225/70 R 19.5, 245/70 R 17.5, 235/75 R 17.5 225/75 R 17.5, 215/75 R 17.5, 245/75 R 16, 235/85 R 16
18	32 x 15* CMT	265/75 R 16, 9.5 R 17.5, 10 R 16.5
19	32 x 19* CMT	215/85 R 16, 10.00 R 15 LT
20	32 x 16*	8.25 R 15, 7.50 R 16
21	31 x 18	205/75 R 17.5
22	31 x 14*	7.00 R 16, 7.50 R 15, 7.00 R 15
23	28 x 16	225/75 R 16, 215/75 R 16, 6.50 R 16, 6.00 R 16, 195 R 15, 185 R 14, 195/75 R 14
24	23 x 10*	6.50-10
25	22 x 09*	155 R 12, 145 R 12, 6.00-9
26	19 x 09*	4.50-10
27	17 x 06*	5.00-8
28	17 x 08*	4.00-8

Note: All suggested envelope selections are to be used as a guide only.

GREEN envelope can be ordered for higher life. All our envelopes marked with * are also available in **GREEN**.

HALF SKIRT (No valve) Seals sidewall to sidewall



Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 28	14.00 R 24
2	46 x 28*	325/95 R 24, 12.00 R 24
3	46 x 22*	445/65 R 22.5, 425/65 R 22.5, 14.00 R 20
4	44 x 25*	12 R 24.5, 11 R 24.5, 11.00 R 24, 13 R 22.5, 11.00 R 22, 12.00 R 20
5	44 x 22*	12.00 R 22, 14/80 R 20
6	44 x 19*	445/65 R 19.5
7	43 x 25*	385/65 R 22.5, 365/80 R 20
8	42 x 22*	315/80 R 22.5, 315/75 R 22.5, 315/70 R 22.5, 12 R 22.5, 11.00 R 20
9	42 x 25*	305/75 R 22.5, 305/70 R 22.5, 295/80 R 22.5 11 R 22.5, 10.00 R 22, 10.00 R 20
10	40 x 18*	295/75 R 22.5
11	40 x 21*	275/70 R 22.5, 10 R 22.5
12	40 x 25*	275/80 R 22.5, 9.00 R 20
13	38 x 25	265/70 R 22.5, 8.25 R 20
14	38 x 20	445/45 R 19.5, 305/70 R 19.5, 10.00 R 15 TR/LB
15	35 x 20*	7.50 R 20, 7.00 R 20, 6.50 R 20, 265/70 R 19.5
16	35 x 16*	285/70 R 19.5, 9.00 R 16
17	32 x 16* CMT	245/70 R 19.5, 9.5 R 17.5, 10 R 16.5, 265/75 R 16
18	32 x 19* CMT	245/65 R 19.5, 235/70 R 19.5, 225/70 R 19.5, 245/70 R 17.5, 245/75 R 16 235/85 R 16, 215/85 R 16, 10.00 R 15 LT
19	32 x 19*	8.25 R 16, 8.25 R 15
20	31 x 18	235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5 7.50 R 16, 7.00 R 16, 7.50 R 15
21	29 x 19	6.50 R 16, 6.00 R 16, 195 R 15
22	28 x 16	225/75 R 16, 215/75 R 16, 7.00 R 15
23	26 x 16	185 R 14, 195/75 R 14
24	21 x 12	155 R 12, 145 R 12, 6.00-9
25	23 x 13*	6.50-10
26	19 x 11*	4.50-10
27	17 x 08*	5.00-8, 4.00-8

Note: All suggested envelope selections are to be used as a guide only.

GREEN envelope can be ordered for higher life. All our envelopes marked with * are also available in **GREEN**.

CURING BAGS AND FLAPS




Sl. No.	Sizes	Sl. No.	Sizes	Sl. No.	Sizes
1	16.9 - 28	9	11 R 22.5	17	8.25 - 16
2	14.9 - 28	10	315/80 R 22.5	18	7.00/7.50 - 16
3	13.6 - 28	11	295/80 R 22.5	19	7.00/7.50 - 15
4	12.4 - 28	12	12.00 - 20	20	6.00 - 16
5	17.5 - 25	13	11.00 - 20	21	6.00 - 14
6	14.00 - 24/25	14	10.00 - 20	22	5.90 - 15
7	12.00 - 24	15	9.00 - 20	23	4.50/5.65 - 12
8	12 R 22.5	16	8.25 - 20	24	4.50 - 10
				25	4.00 - 8



Sl. No.	Flap size (Inches)	Tyre Size (Suggested)
1	22.5 Extra Wide	385/65 R 22.5, 315/80 R 22.5, 12 R 22.5
2	22.5	295/80 R 22.5, 11 R 22.5
3	20 Extra Wide	12.00 R 20, 11.00 R 20, 10.00 R 20, 12.00 x 20, 11.00 x 20
4	20 SUPER	10.00 x 20, 9.00 x 20, 9.00 R 20, 8.25 x 20, 8.25 R 20
5	16 LCV	8.25 R 16, 7.50 R 16, 7.00 R 16, 7.50 R 15, 7.00 R 15

OTR TYRES 'O' SEALING RINGS

Sealing the tubeless tyre beads of OTR vehicle with split rims

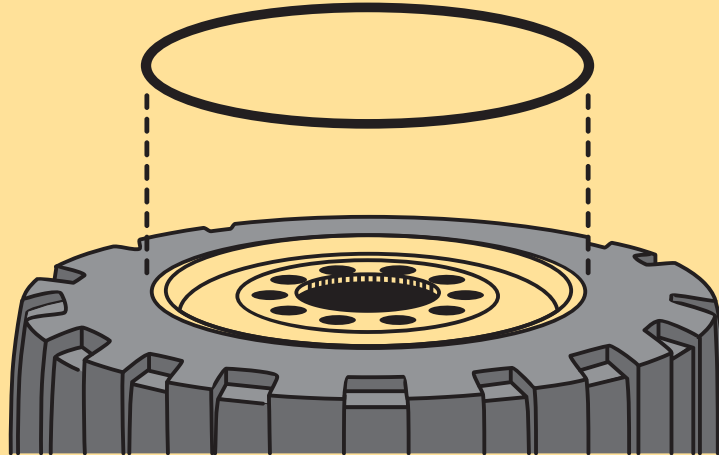

SL	Product Code	Thickness (mm)	Rim Size (Inches)	Tyre Size (Suggested)
1	OR 20 THIN	6.5	20	365/80-20, 385/80-20 14.00-20, 16.00-20, 18-20 20-20, 22-20
2	OR 24 THIN	6.5	24	13.00-24, 14.00-24, 16.00-24
3	OR 25 THIN	6.5	25	15.5-25, 17.5-25
4	OR 25 THICK	9.5	25	14.00-25, 16.00-25 18.00-25, 20.5-25 23.5-25, 26.5-25, 29.5-25
5	OR 29 THICK	9.5	29	26.5-29, 29.5-29, 33.25-29 775/65 R 29, 875/65 R 29
6	OR 33 THICK	9.5	33	18.00-33, 21.00-33 35/65-33, 33.25-33
7	OR 35 THICK	9.5	35	21.00-35, 24.00-35, 29.5-35 33.25-35, 37.25-35
8	OR 45 THICK	9.5	45	45/65-45
9	OR 49 THICK	9.5	49	27.00-49
10	OR 51 XT	13.0	51	30.00-51, 33.00-51 36.00-51, 50/65-51
11	OR 57 XT	13.0	57	37.00-57, 40.00-57, 42/90 R 57 46/90 R 57, 50/80 R 57, 55/80 R 57 50/90 R 57, 60/80 R 57, 65/65-57

MIDAS TREADS INDIA PVT. LTD.

Midas Marketing Building
Varissery Junction, Mariathuruthu P.O.
Kottayam - 686 017, Kerala, India.
Phone: 91-481-2561215
E-mail: ramnath.r@midastreads.com (Export Division)
sales@midastreads.com (Domestic Division)
Website: www.midas.co.in

